




Electric Series : E-RAD 8000

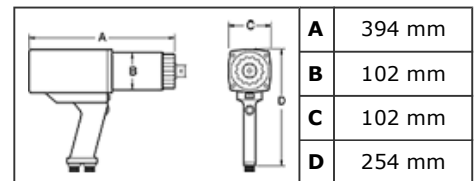

Part No.	Tool Model	Drive Size	Torque (low - high)	RPM	Weight	Noise Level
15955	E-RAD 8000	1.5 in.	2030-8100 Nm	4	13 kg	75 db

Imperial | **Metric**

[View Comparison Chart](#)

Accuracy of +/-3%, Repeatability of +/-2%

Select one of the following controllers

PART #	DESCRIPTION	CASE TYPE	VOLTAGE	LENGTH	HEIGHT	WIDTH
13632	Controller	Steel Assembly	120	14.9"	11.8"	8"
13626	Controller	Weatherproof Assembly	120	18.5"	6.9"	14"
13627	Controller	Steel Assembly	220	14.9"	11.8"	8"
14108	Controller	Weatherproof Assembly	220	18.5"	6.9"	14"

Select one of the following cable lengths

PART #	TOOL MODEL	CABLE LENGTH (FT)
10984	Cable length from controller to tool model (standard with tool)	15
11845	Cable length from controller to tool model	20
11846	Cable length from controller to tool model	25

Options

Option 1 (13629)	Option 2 (13630)	Option 3 (13631)
User has the option to define torque settings. Settings can be stored using an 8 channel selector switch and can	User has the option to define torque or angle or torque and angle sequence (1 channel). Tool operates as standard E-RAD when angle is set	User has the option to define torque or angle or torque and angle sequence. The defined settings can be stored using an 8 channel selector switch. All defined settings can be locked

be locked out using a removable key. Basic data collection is included.

to zero. Basic data collection is included.

out using a removable key. Basic data collection is included.

PART #	DESCRIPTION	FOR USE WITH
13629	Selector switch with user defined torque	All E-RAD'S
13630	User defined torque and angle (1 channel)	All E-RAD'S
13631	User defined torque and angle (8 channel)	All E-RAD'S
13628	Super duty fan kit	E-RAD 2700 and E-RAD 4000

Corresponding Reaction Arms

 <p>Standard (comes with tool) Part No: 16368</p>	 <p>Deep Socket Part No: N/A</p>	 <p>Double Ended Arm Part No: N/A</p>	 <p>Blank Part No: 16260</p>	 <p>Double Ended Blank Part No: N/A</p>
---	--	---	---	---

