




Pneumatic Series : 475SL

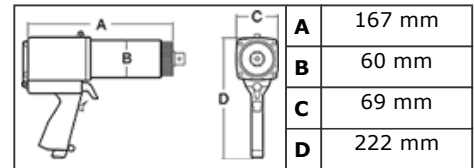

Part No.	Tool Model	Drive Size	Torque (low - high)	RPM	Weight	Noise Level
13573	475SL	0.75 in.	70-475 Nm	65	2.7 kg	80 db

[Imperial](#) | [Metric](#)

[View Comparison Chart](#)

Accuracy of +/-5%, Repeatability of +/-2%

Highest Power-to-Weight ratio of any power tool.

All RAD® torque guns are designed to deliver the highest power-to-weight ratio of any pneumatic torque tool on the market today, saving you time and money in maintenance or production costs.

Accuracy +/-5%, repeatability 2%*.

Every RAD® air torque wrench is individually calibrated and traceable to NIST standards to help ensure joint integrity. Our tools are many times more accurate than impact wrenches.

* With correct air supply

88 times less vibration than Impact wrenches...Operates at only 80 db

RAD® torque guns are one of the safest power air tools on the market today. Our exclusive low profile reaction arm takes virtually all the operational load off the operator, reducing injuries and greatly reducing operating costs.

Each RAD® pneumatic tool includes a standard reaction arm, 12' hose & fittings, and a regulator and tool holder (see above photo).

To ensure the highest quality of measurement and accuracy, each RAD® pneumatic tool comes individually calibrated traceable to NIST standards.

Corresponding Reaction Arms

 <p>Standard (comes with tool) Part No: 10686</p>	 <p>Deep Socket Part No: 10687</p>	 <p>Double Ended Arm Part No: 10688</p>	 <p>Blank Part No: 10036</p>	 <p>Double Ended Blank Part No: 10037</p>
---	--	---	---	---

